ENGLISH

DT412/DT422/DT432

Cordless Telephones for Aastra MX-ONE™ and Aastra MD110

Quick Reference Guide

This Quick Reference Guide includes short descriptions on how to use the basic features. More features, legal text and technical requirements are available in the User Guide.

The complete User Guide is available in electronic format on the Enterprise Telephone Toolbox CD and on http://www.aastra.com

Switching On/Off

Switch on: *(Until display on)* Yes *(Within 2 seconds)*

Switch off: *Press and hold Hot key* Yes

Free Seating[1]

Note: Free seating is not supported by IP DECT.

Log on: ✳ 1 1 ✳ *Authorization code* ✳ *Own ext. No.* #

Log off: # 1 1 #

Answer Calls

Answer:

Handsfree: *Press middle soft key*

On another ext. (Call pick-up): *Call ringing ext.* 8 *France:* 4*; Sweden:* 6

End call:

Make Calls

On hook: *Ext. No. or External line code and No.*

Off hook: *Ext. No. or External line code and No*

Handsfree: *Dial No. and press middle soft key*

Common Speed Dialing number: *Dial Speed Dialing No.*

Dial a number via Hot/Soft key: *Press and hold preprogrammed Hot key or Press preprogrammed Soft key*

Make a call via the phone book: Find *Enter first letter of name* Ok ⌃ or ⌄ *(Until name is displayed)*

Dial number from the call list: ⌄ *(Until number is displayed)*

Last External Number Redial: ✳ ✳ ✳ *Finland, Sweden:* ✳ ✳ 0

Inquiry

Ongoing conversation: R *(See display) Call 3rd party*

Refer back: 2

Return and finish Inquiry: R *(See display)*

Transfer

Ongoing conversation: R *(See display) Call 3rd party* *(Before or after answer)*

Conference

Ongoing conversation: R *(See display) Call 3rd party* 3 *(After answer)*

Callback

Activate: 6 *Finland, France, Sweden:* 5

Cancel single Callback: # 3 7 ✳ *Ext. No.* #

Cancel all Callbacks: # 3 7 #

Call Waiting

Activate: 5 *(At busy tone) Wait on line* *Finland and France:* 6*; Sweden:* 4

Handsfree

Activate or Deactivate: *Press middle soft key*

General Deactivation

Cancel all activated features: # 0 0 1 #

Menu structure

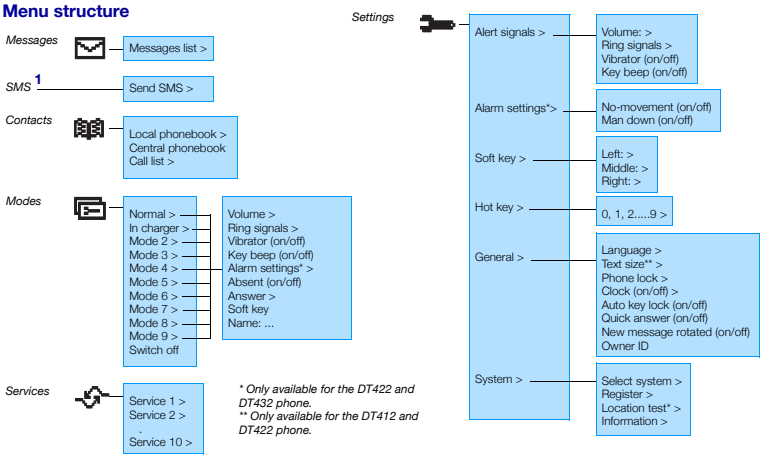

On hold

Put a call on hold: R *(See display)*

Resume call: *(Within 30 seconds)*

Resume on another extension: *Call ext. where call was put on hold* 8 *France:* 4*; Sweden:* 6

Internal Follow-me

Order from your own extension: ✳ 2 1 ✳ *New ext. No.* # *U.K.:* ✳ 2 ✳

Cancel: # 2 1 # *U.K.:* # 2 #

External Follow-me

Order: ✳ 2 2 # *External line code and No.* #

Cancel: # 2 2 #

Personal Number[1]

Activate or change profile from own extension: ✳ 1 0 ✳ (1 - 5) #

Cancel: # 1 0 #

Voice Mail[1]

Enter your mailbox: *Dial voice mail No. and follow recorded instructions*

New message received: Listen *Follow recorded instructions*

Program a Hot/Soft key with a number

Program: ☰ ‹ or › *(Settings)* ⌄ *(Soft key or Hot key)* › ⌄ or ⌃ *(Select key)* › Edit *Enter name* Save ⌄ Change ⌄ *(Phone call)* Select *Enter No.* Save

Absence Information[1]

Order: ✳ 2 3 ✳ *Absence code*

With return date/time: ✳ *Date/Time* # *(Date sequence is system dependent)*

Without return date/time: #

Cancel: # 2 3 #

Abbreviations and Explanations

ext.	Extension	Yes, Find, Ok, Listen, Edit, Save, Change, Select	Soft key
No.	Number		
1	Feature may be optional		

Subject to alteration without prior notice. For more information, please contact your Aastra certified Sales Partner.

© Aastra Telecom Sweden AB 2008. All rights reserved.
EN Part of LZV 103 006 R7A

Downloaded from www.Manualslib.com manuals search engine